


airvent[≡]

SM ACOUSTIC



Colours


- White RAL 9003
- Brown RAL 8017
- Basalt Grey RAL 7012
- Grey RAL 7016
- Oak RAL 8001
- Bespoke RAL

DIMENSIONS:
(width x height x depth)

- Internal Vent (example):** 399 x 45 x 45 [mm]
- Acoustic Hood:** 399 x 45 x 35 [mm]
- Slim Hood:** 399 x 26 x 20 [mm]
- Flat Grille:** 399 x 23 x 3 [mm]

SLOT DETAIL [mm]:

Screw holes for the hood are offset 11 mm from the centre of the slot.

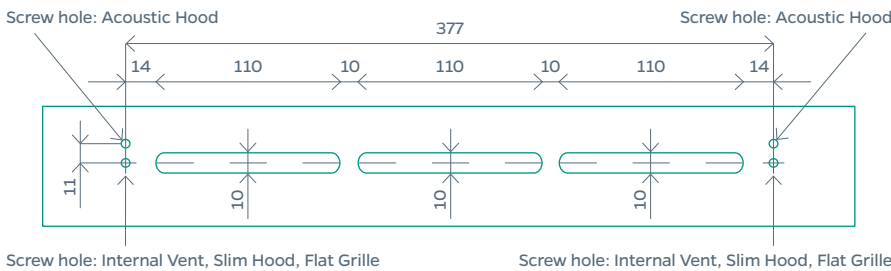

FEATURES:

- ✓ 40 db Dne W reduction in the open position
- ✓ 2500mm² Equivalent Area
- ✓ 3 external hood options
- ✓ 3 airflow modes with variable opening settings
- ✓ Modern, rounded design
- ✓ Manufactured from high quality, UV-stabilised ABS
- ✓ External hood complete with insect grille as standard
- ✓ Unique gasket seal design
- ✓ Removable slot trickle option as standard
- ✓ 5 year manufacturers guarantee

AIRFLOW / ACOUSTIC / WATER TIGHTNESS:

Under normal conditions the SM ACOUSTIC achieved the following Sound Reduction results:

	Equivalent Area EA [mm ²]	Open position D _{n,e,w} (C;C _{tr})	Closed position D _{n,e,w} (C;C _{tr})	Water tightness (Closed Position) [Pa]
SM Acoustic + Acoustic Hood	2500	40 (0;-1) dB	44(-1;-2)dB	600
SM Acoustic + Slim Hood	2500	36 (0;0) dB	40(0;-1)dB	400
SM Acoustic + Flat Grille	2500	38 (-1;-1) dB	42(0;-2)dB	400

CROSS SECTION [mm]*:

