


# airvent

## Prestige Acoustic

The prestige acoustic vents offers full ventilation up to 45dB. Stylish design available in a range of colours. This vent also offers dynamic trickle effect, where attenuation is increased while still giving 15% trickle venting to remove stale air.



**Prestige acoustic vent:** 420 x 52 x 44 [mm]



**Prestige acoustic spacer:** 421 x 47 x 31 [mm]




**Prestige acoustic hood:** 405 x 34 x 45 [mm]

**Colours**

- RAL 9016
- RAL 7040
- RAL 7016
- RAL 8017
- RAL 8003
- RAL 9005

Choose vent and hood for dual colour options.

**SLOT DETAIL [mm]:**

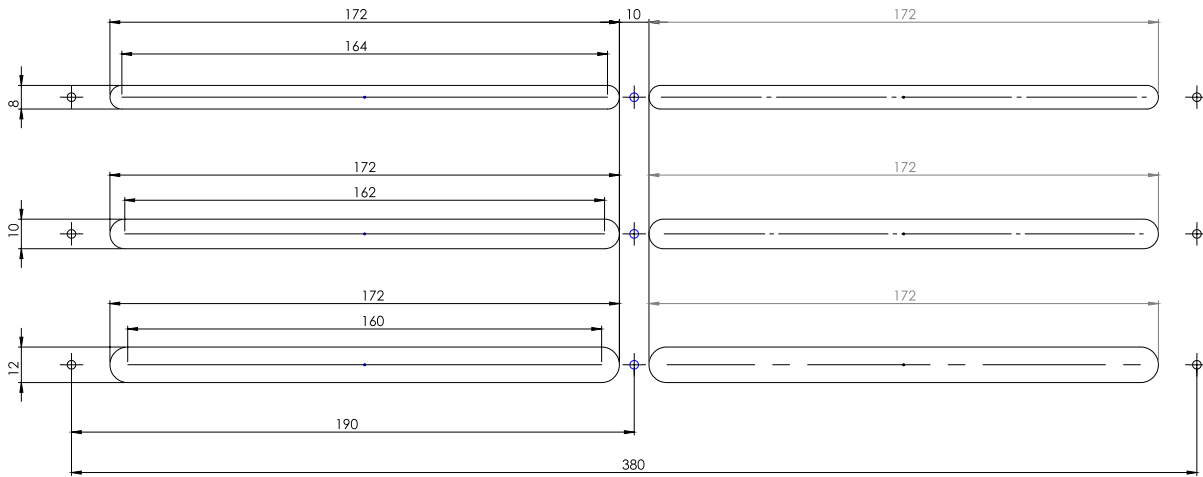

**FEATURES:**

- ✓ Manual and automatic control of the airflow to the room
- ✓ Increased comfort thanks to connector and acoustic hood
- ✓ Suitable for all types of windows

**INSTALLATION:**

On the exterior side, a dB-R Press air hood is installed for increasing sound insulation. It consists of a drip cap, insect protection mesh and a stabiliser to limit the maximum flow. The Prestige Acoustic regulator is mounted on the inside part of the window.

**ACOUSTIC / EQUIVALENT AREA / WATER TIGHTNESS:**

Under normal conditions the Prestige Acoustic achieved the following Sound Reduction results:

Vent	Acoustic performance [dB]		Equivalent Area (EA) [mm <sup>2</sup> ]	Water tightness* [Pa]
	open position Dn, e, w (C, Ctr)	closed position Dn, e, w (C, Ctr)		
Prestige acoustic vent + acoustic hood	42 (-1; -2) dB	43 (0; -1) dB	3100	300
Prestige acoustic vent + spacer + acoustic hood	45 (-2; -3) dB	47 (-2; -3) dB	3160	300

\*To achieve the required Water Tightness performance up to 300 Pa, the unit must be sealed with silicone along the housing joints to ensure proper tightness.

**CROSS SECTION:**

